


荧光蓬顶灯 FLUORESCENT CEILING LIGHT

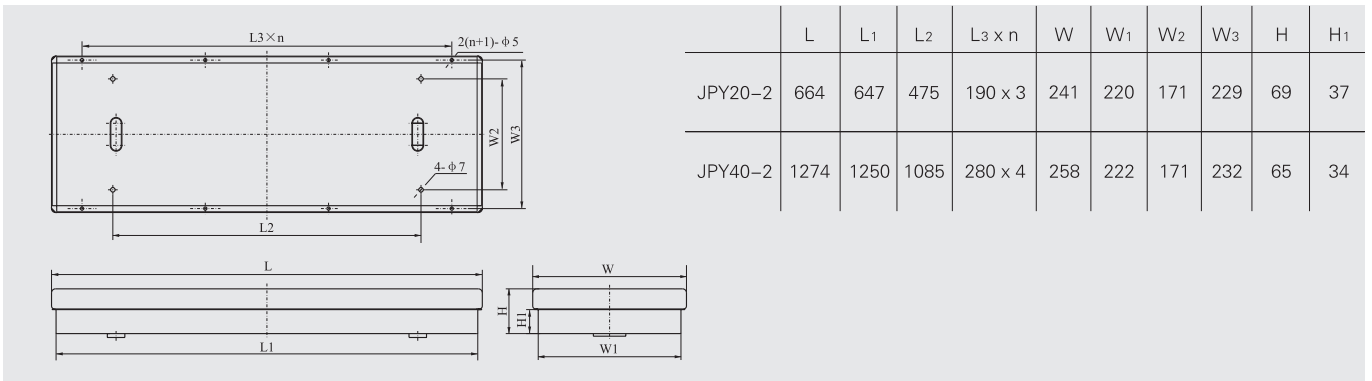

适用范围:

用于干燥舱室，如船员和旅客的居住舱、休息室、餐厅、驾驶室、报务室等场所。

产品特点:

1. 灯具安装方式为嵌入式，结构紧凑，外观精致；
2. 灯罩为优质亚克力板制成，不变色、韧性好，光线柔和；
3. 灯具内部配置补偿电容，启动效果好，灯座为旋转式，接触性能好；
4. 灯具可配有B15d灯座,用于24V/15W应急灯泡照明，其灯罩的边缘标有●标志，订货时请注明需应急装置。

产品认证:

经中国船级社"CCS"型式认可。

The scope:

Applied to dry cabin, such as the residence, rest room, dining room, cab, operator of the sailors and passengers

The scope of application:

1. The installation way of the light is recessed-type, compact structure and delicacy appearance.
2. The lampshade is made of PC, not discolor, fine toughness, softness ray.
3. Equipped compensating capacitance inside the lamp holder, also has the good effect of start, spin-type of lamp holder, has fine contact function.
4. The lamp equipped B15d lampholder, used for 24V/15W emergency bulb, the edge of lampshade marks the●marking, remark clearly that need the emergency device when order.

Production authentication:

Approved by the CCS(China Classification Society).

规格specification:

型号 Type	功率 Power	电压 Voltage	功率因数 Power factor	灯座 Lamp holder	防护等级 Protection class	重量 Weight	备注 Remark
JPY20-2	2 x 20W	110V/60Hz 220V/50Hz 220V/60Hz	>0.85	G13	IP22	5.2kg	—
JPY20-2E						5.2kg	带应急 with emergency
JPY40-2	2 x 40W		>0.85	G13		11.5kg	—
JPY40-2E			11.5kg			带应急 with emergency	