


荧光舱顶灯 FLUORESCENT PENDANT LIGHT

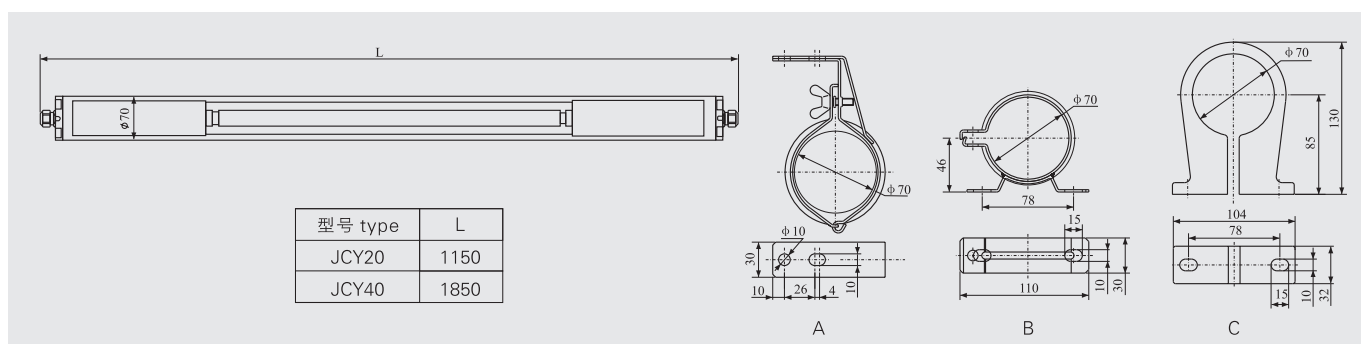

适用范围:

1. 适用于各类船舶有滴水、溅水、凝水和深水场所，如机炉舱、干货舱、轴隧、管弄、露天甲板和水下20m等场所照明之用；
2. 工作环境温度为-20℃~+55℃。

产品特点:

1. 采用密封结构, 具有高防水能力, 体积紧凑, 外观精美;
2. 选用旋转式进口灯座, 内部接线方便等特点;
3. 灯具内配有补偿电容, 启动效果好等特点。
4. 该灯具具有A、B、C三种安装支架, 订货时请注明

产品认证:

1. 经中国船级社“CCS”型式认可;
2. 采用IEC60092-306-2009标准;
3. 符合《钢质海船入级规范》, 专利号: ZL2004 30018 542.9。

The scope of application:

1. Applied to illumination of water dripping, water spattering, water coagulating place in ships, such as oven cabin, dry cabin, tunnel, pipeline, weather deck and 20m under water etc.
2. The environmental temperature for work is $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$

Products characteristic:

1. Adopt seal structure, and have high waterproof performance, has compact structure and delicacy appearance .
2. Adopt the import spin-type of lamp holder performance, and it is convenient to connect inside..
3. Equipped compensating capacitance inside the lamp, also has the good effect of start.
4. This light has three types brackets, Pls mark when order

Production authentication:

1. The product approved by the CCS(China Classification Society).
2. Adopt IEC60092-306-2009 standard.
3. Conform to GRADE ENTRY NORMS FOR STEEL SHIPS, the patent No is ZI2004 30018 542.9

规格Specifications:

型号 Type	功率 Power	电压 Voltage	补偿电容 Compensating capacitance	功率因数 Power factor	灯座 Lamp Holder	电缆外径 Cable outside diameter	防护等级 Protection class	重量 Weight
JCY20-1	1×20W	110V/60Hz 220V/50Hz 220V/60Hz	4.75 μ f	>0.85	G13	φ 8~ φ 13	IP68	3.0kg
JCY40-1	1×40W		4.75 μ f	>0.85				4.2kg